

# LED Linkable Linear Strip

Part Number

**PEITLED58-D40ES**

Project \_\_\_\_\_

Date \_\_\_\_\_


Type \_\_\_\_\_

Location \_\_\_\_\_


## Product Specifications

Construction	Durable aluminum housing Polycarbonate diffuser lens
Dimensions	58" Length x 1" Width x 1-1/4" Height
Dim Capacity	10 – 100% (with compatible dimmer)
Wattage	22-Watt
Brightness	2022 Lumens
Colour Temperature	4000 Kelvins (cool white)
Colour Rendering	84 CRI
Voltage / Frequency	120V / 60Hz
Power Factor	> 0.95
On/Off Switch	Built-in switch
Finish	White
Operating Temp	-20 Min to +50 Max
Max Interconnections	10 units
Average Rated Life	up to 36,000 Hours
Listed	cULus, Energy Star Suitable for dry locations only
Mounting Hardware	Included (butt end, mounting clips, screw set)
Junction Box	Required ( <b>PEJB005</b> sold separately)
Features	Flicker free start up Solid state device, vibration resistant High Performance LED technology Low noise electronic LED driver

Side View

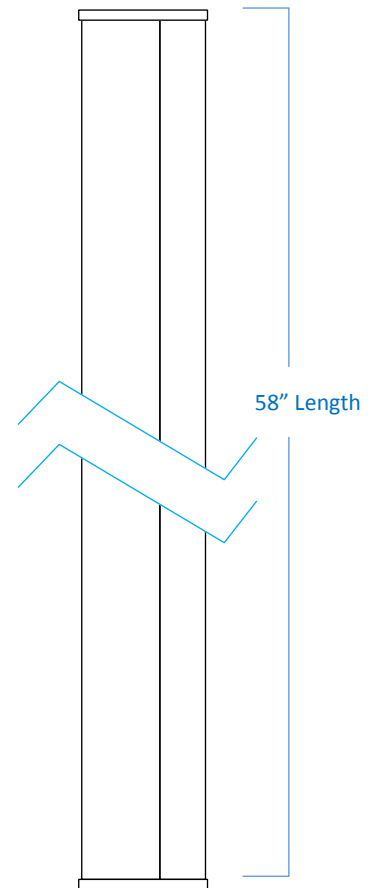

End View



GTA Office: 151 Aviva Park Drive, Woodbridge  
Ottawa Office: 200 Iber Road, Unit 5, Stittsville

Tel: 905-669-1230  
Tel: 613-836-1977

www.sanremolighting.com  
© All rights reserved

