

4" Slim LED Downlight

Part Number

AFR4-0940-BN

Project _____


Date _____

Type _____

Location _____

Product Specifications

| | |
|------------------|--|
| Description | 4" Round Slim Recessed LED |
| Finish | Brushed Nickel |
| Wattage | 9W = 50W Halogen |
| Dimensions | Ø 5" Outer Diameter x 1/2" Height |
| Cut Out | Ø 4-1/8" – 4-1/4" |
| Dim Capacity | Dimmable (with compatible TRIAC dimmer) Dimmable down to 10% |
| Rated Lamp Life | Up to 36,000 hours |
| Brightness | 635 Lumens |
| Colour Temp. | 4000 Kelvins (cool white) |
| Colour Rendering | ≥ 80 CRI |
| Operating Temp. | -40°C to 40°C (-40°F to 104°F) |
| Beam Angle | 110° beam |
| Certifications | cETLus Energy Star Certified Certified to CSA standards Suitable for wet locations Type IC rated for direct contact with insulation |
| Features | 120V 60Hz Slim 1/2" design fits in limited ceiling space Reduce labour time with quick installation No potlight housing required |

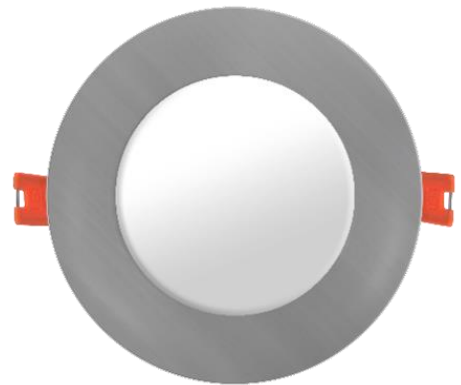

Includes one junction box with quick connectors and factory-installed driver inside.



4" Slim LED Downlight

Part Number

AFR4-0940-BN

| 120V Compatible Dimmers | |
|-------------------------|---------------|
| BRAND | MODEL |
| LUTRON | CTCL-153PDH |
| | CTCL-153P |
| | CT-600P |
| | DVCL-153P |
| LEVITON | 6672 |
| | 6674 |
| PASS & SEYMOUR | HCL453PTCCCV6 |

