

# 4" Gimbal LED Downlight

## Part Number

R4GD-D30ES-WH

R4GD-D30ES-BN

R4GD-D30ES-BK

## Finish

White

Brushed Nickel

Black

Project

Date

Type

Location

## Product Specifications

Description	4" Round Gimbal Recessed LED
Wattage	9W = 60W Halogen
Dimensions	Ø 5" Outer Diameter x 1-1/2" Height Ø 3-1/8" Gimbal Diameter
Cut Out	Ø 4-1/8"
Dim Capacity	Dimmable (with compatible TRIAC dimmer) Dimmable down to 10%
Rated Lamp Life	Up to 35,000 hours
Brightness	700 Lumens
Colour Temp.	3000 Kelvins (warm white)
Colour Rendering	≥ 80 CRI
Operating Temp.	-40°C to + 40°C (-40°F to 104°F)
Beam Angle	40° beam angle (30° tilt angle)
Certifications	cETLus   Energy Star Certified Certified to CSA standards Suitable for damp locations Type IC rated for direct contact with insulation
Features	120V   60Hz Slim 1-1/2" design fits in limited ceiling space Reduce labour time with quick installation No potlight housing required Ideal for soffit installation and accent lighting





GTA Office: 151 Aviva Park Drive, Woodbridge  
Ottawa Office: 200 Iber Road, Unit 5, Stittsville

Tel: 905-669-1230  
Tel: 613-836-1977

www.sanremolighting.com  
© All rights reserved

# 4" Gimbal LED Downlight

Includes one junction box with quick connectors and factory-installed driver

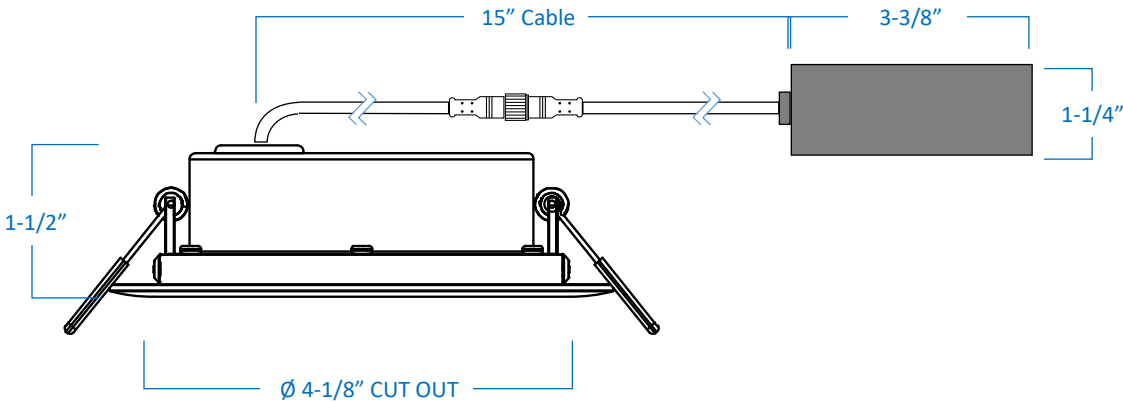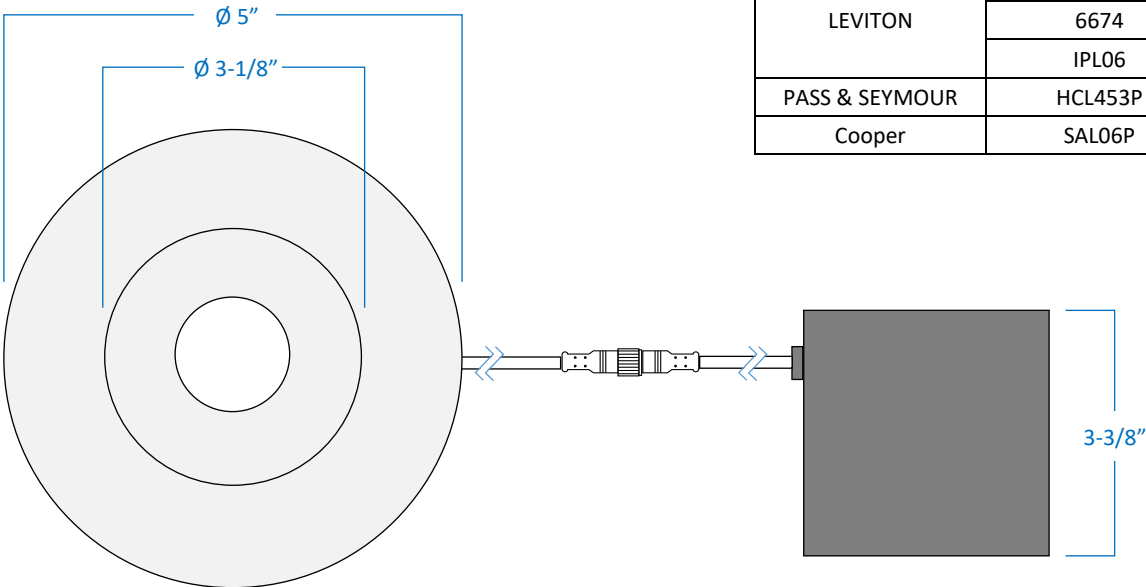

120V Compatible Dimmers	
BRAND	MODEL
LUTRON	TGCL-153PH
	LGCL-153PH
	MACL-153M
	DVCL-153P
	CTCL-153P
LEVITON	6672
	6674
	IPL06
PASS & SEYMOUR	HCL453P
Cooper	SAL06P