

4" Gimbal LED Downlight

Part Number

R4GD-D40ES-WH
R4GD-D40ES-BN
R4GD-D40ES-BK

Finish

White
Brushed Nickel
Black

Project _____

Date _____

Type _____

Location _____

Product Specifications

Description	4" Round Gimbal Recessed LED
Wattage	9W = 60W Halogen
Dimensions	Ø 5" Outer Diameter x 1-1/2" Height Ø 3-1/8" Gimbal Diameter
Cut Out	Ø 4-1/8"
Dim Capacity	Dimmable (with compatible TRIAC dimmer) Dimmable down to 10%
Rated Lamp Life	Up to 35,000 hours
Brightness	830 Lumens (R4GD-D40ES-WH) 750 Lumens (R4GD-D40ES-BN) 750 Lumens (R4GD-D40ES-BK)
Colour Temp.	4000 Kelvins (cool white)
Colour Rendering	≥ 80 CRI
Operating Temp.	-40°C to + 40°C (-40°F to 104°F)
Beam Angle	40° beam angle (30° tilt angle)
Certifications	cETLus Energy Star Certified Certified to CSA standards Suitable for damp locations Type IC rated for direct contact with insulation
Features	120V 60Hz Slim 1-1/2" design fits in limited ceiling space Reduce labour time with quick installation No spotlight housing required Ideal for soffit installation and accent lighting




GTA Office: 151 Aviva Park Drive, Woodbridge
Ottawa Office: 200 Iber Road, Unit 5, Stittsville

Tel: 905-669-1230
Tel: 613-836-1977

www.sanremolighting.com
© All rights reserved

4" Gimbal LED Downlight

Includes one junction box with quick connectors and factory-installed driver

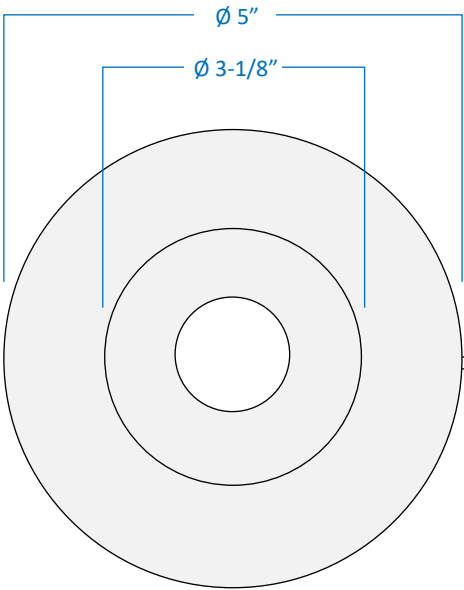

120V Compatible Dimmers	
BRAND	MODEL
LUTRON	TGCL-153PH
	LGCL-153PH
	MACL-153M
	DVCL-153P
	CTCL-153P
LEVITON	6672
	6674
	IPL06
PASS & SEYMOUR	HCL453P
Cooper	SAL06P

