

LED Linkable Linear Strip

Part Number

PEUC24

Project _____




Date _____

Type _____

Location _____

Product Specifications

Construction	Durable aluminum housing Polycarbonate diffuser lens
Dimensions	22-5/8" Length x 1" Width x 1-1/4" Height
Finish	White
Colour Temperature	Selectable – 3000K / 4000K / 5000K
Brightness	950 Lumens
Dim Capacity	10 – 100% (with compatible dimmer)
Wattage	9-Watt
Colour Rendering	84 CRI
Voltage / Frequency	120V / 60Hz
Power Factor	> 0.95
On/Off Switch	Built-in Switch
Operating Temp	-20 Min to +50 Max
Max Interconnections	10 units
Average Rated Life	up to 50,000 Hours
Listed	cULus Suitable for dry locations only
Mounting Hardware	Included (butt end, mounting clips, screw set)
Junction Box	Required (PEJB005 sold separately)
Features	Flicker free start up Solid state device, vibration resistant High Performance LED technology Low noise electronic LED driver

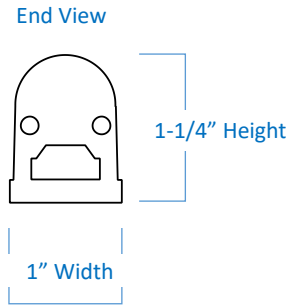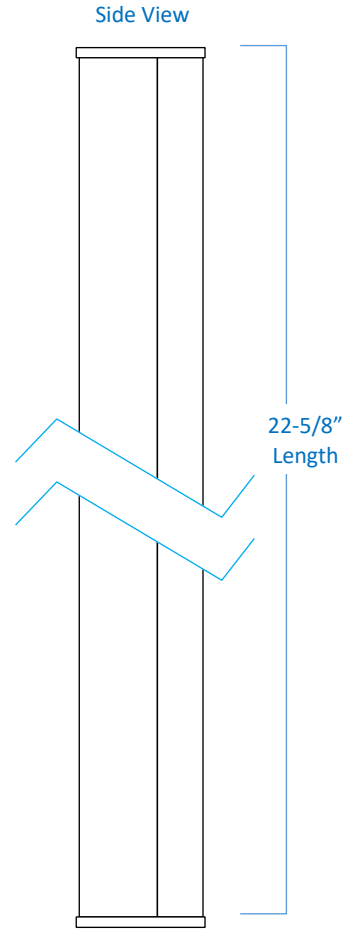

GTA Office: 151 Aviva Park Drive, Woodbridge
Ottawa Office: 200 Iber Road, Unit 5, Stittsville

Tel: 905-669-1230
Tel: 613-836-1977

www.sanremolighting.com
© All rights reserved