

# LED Linkable Linear Strip

Part Number

**PEUC58**

Project \_\_\_\_\_

Date \_\_\_\_\_


Type \_\_\_\_\_

Location \_\_\_\_\_

## Product Specifications

Construction	Durable aluminum housing Polycarbonate diffuser lens
Dimensions	58" Length x 1" Width x 1-1/4" Height
Finish	White
Colour Temperature	Selectable – 3000K / 4000K / 5000K
Brightness	2,200 Lumens
Dim Capacity	10 – 100% (with compatible dimmer)
Wattage	22-Watt
Colour Rendering	84 CRI
Voltage / Frequency	120V / 60Hz
Power Factor	> 0.95
On/Off Switch	Built-in Switch
Operating Temp	-20 Min to +50 Max
Max Interconnections	10 units
Average Rated Life	up to 50,000 Hours
Listed	cULus   Suitable for dry locations only
Mounting Hardware	Included (butt end, mounting clips, screw set)
Junction Box	Required ( <b>PEJB005</b> sold separately)
Features	Flicker free start up Solid state device, vibration resistant High Performance LED technology Low noise electronic LED driver

Side View

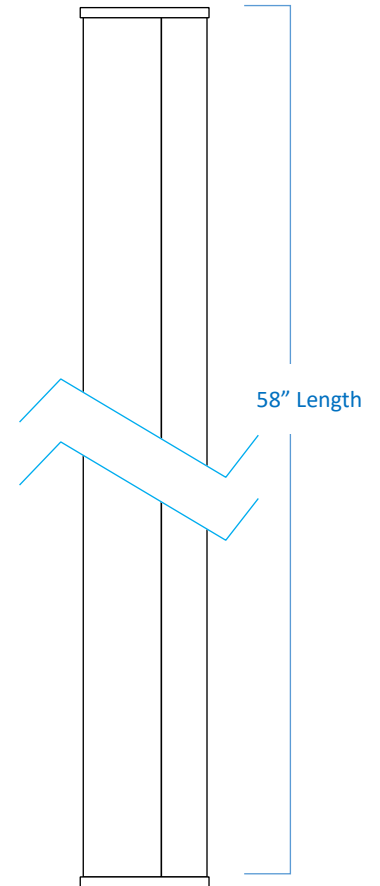

End View

