

# 4" Gimbal LED Downlight 3CCT

Part Number

**R4GD-BK**

Project \_\_\_\_\_

Date \_\_\_\_\_

Type \_\_\_\_\_

Location \_\_\_\_\_


## Product Specifications

Description	4" Round Gimbal Recessed LED
Finish	Black trim with clear polycarbonate lens
Wattage	9W = 65W Halogen
Dimensions	5" Outer Diameter x 1-1/2" Height
Cut Out	Ø 4-1/4"
Dim Capacity	Dimmable (with compatible TRIAC dimmer) Dimmable down to 10%
Rated Lamp Life	Up to 35,000 hours
Brightness	620-700 Lumens
Colour Temp.	Selectable CCT – 3000K, 4000K, 5000K
Colour Rendering	RA>90 CRI
Operating Temp.	-40°C to +40°C (-40°F to +104°F)
Beam Angle	40° Beam angle (30° tilt angle)
Certifications	cETLus   Energy Star Certified Certified to CSA standards Suitable for damp locations Type IC rated for direct contact with insulation
Features	120V   60Hz Slim 1-1/2" design fits in limited ceiling space Reduce labour time with quick installation No potlight housing required Ideal for soffit installation and accent lighting



Includes one junction box with quick connectors and factory-installed driver inside.

3CCT switch on side of box.



**3000K**  
**4000K**  
**5000K**



GTA Office: 151 Aviva Park Drive, Woodbridge  
Ottawa Office: 200 Iber Road, Unit 5, Stittsville

Tel: 905-669-1230  
Tel: 613-836-1977



www.sanremolighting.com  
© All rights reserved

# 4" Gimbal LED Downlight 3CCT

Part Number

**R4GD-BK**

120V Compatible Dimmers	
BRAND	MODEL
LUTRON	CTCL-153PDH
	CTCL-153P
	CT-600P
	DVCL-153P
LEVITON	6672
	6674
PASS & SEYMOUR	HCL453PTCCCV6

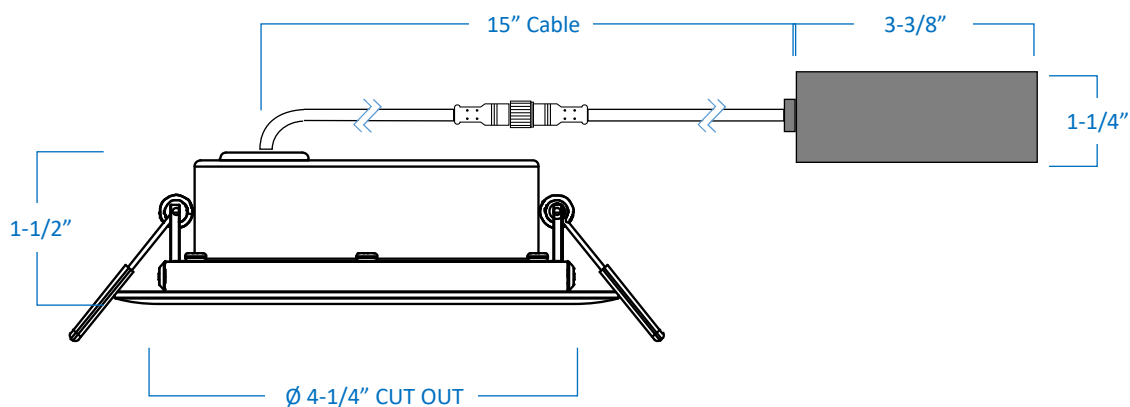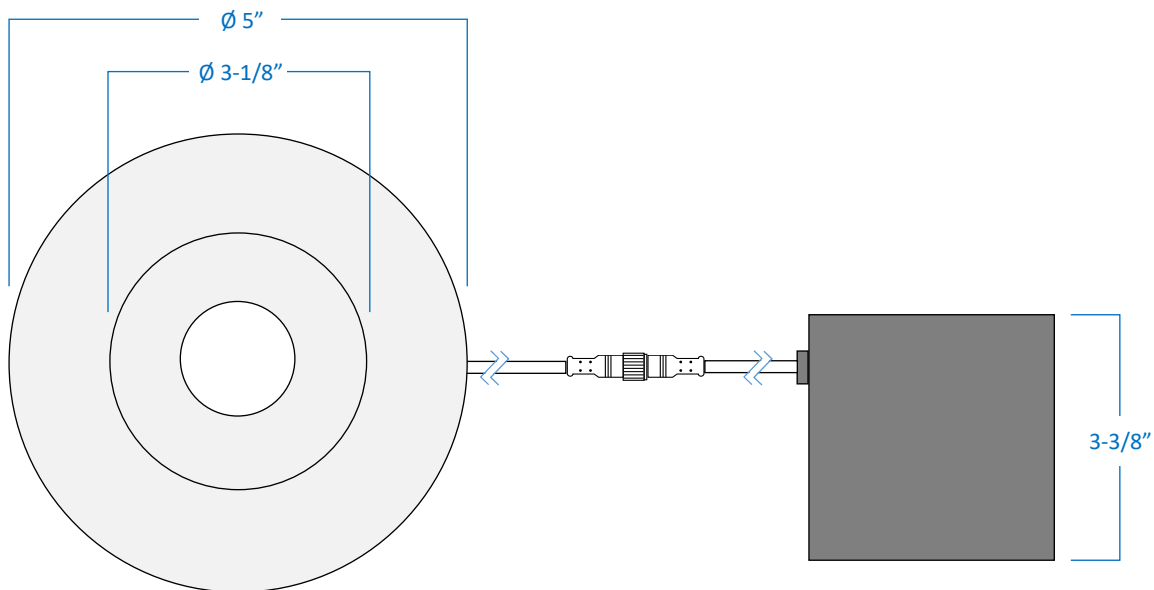

GTA Office: 151 Aviva Park Drive, Woodbridge  
 Ottawa Office: 200 Iber Road, Unit 5, Stittsville

Tel: 905-669-1230  
 Tel: 613-836-1977

www.sanremolighting.com  
 © All rights reserved