
## LED Linkable Linear Strip

## **Part Number**


## PEITLED09-D30ES

| Project  |  |
|----------|--|
| Date     |  |
| Туре     |  |
| Location |  |

| Product Specifications |   |  |
|------------------------|---|--|
| Construction           | Durable aluminum housing Polycarbonate diffuser lens  |  |
| Dimensions             | 9" Length x 1" Width x 1-1/4" Height  |  |
| Dim Capacity           | 10 – 100% (with compatible dimmer)  |  |
| Wattage                | 3-Watt  |  |
| Brightness             | 256 Lumens  |  |
| Colour Temperature     | 3000 Kelvins (warm white)   |  |
| Colour Rendering       | 84 CRI  |  |
| Voltage / Frequency    | 120V / 60Hz   |  |
| Power Factor           | > 0.95  |  |
| On/Off Switch          | No Switch   |  |
| Finish                 | White   |  |
| Operating Temp         | -20 Min to +50 Max  |  |
| Max Interconnections   | 10 units  |  |
| Average Rated Life     | up to 36,000 Hours  |  |
| Listed                 | cULus, Suitable for dry locations only  |  |
| Mounting Hardware      | Included (butt end, mounting clips, screw set)  |  |
| Junction Box           | Required (PEJB005 sold separately)  |  |
| Features               | Flicker free start up Solid state device, vibration resistant High Performance LED technology Low noise electronic LED driver |  |

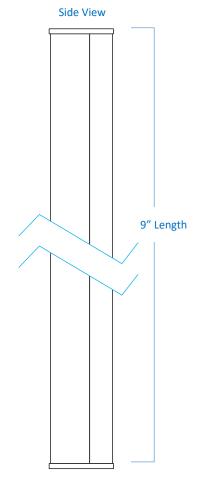









GTA Office: 151 Aviva Park Drive, Woodbridge Ottawa Office: 200 Iber Road, Unit 5, Stittsville

Tel: 905-669-1230 Tel: 613-836-1977 www.sanremolighting.com © All rights reserved