
LED Linkable Linear Strip

Part Number


PEITLED58-D40ES

| Project | |
|----------|--|
| Date | |
| Туре | |
| Location | |

| Product Specifications | | |
|------------------------|--|--|
| Construction | Durable aluminum housing Polycarbonate diffuser lens | |
| Dimensions | 58" Length x 1" Width x 1-1/4" Height | |
| Dim Capacity | 10-100% (with compatible dimmer) | |
| Wattage | 22-Watt | |
| Brightness | 2022 Lumens | |
| Colour Temperature | 4000 Kelvins (cool white) | |
| Colour Rendering | 84 CRI | |
| Voltage / Frequency | 120V / 60Hz | |
| Power Factor | > 0.95 | |
| On/Off Switch | Built-in switch | |
| Finish | White | |
| Operating Temp | -20 Min to +50 Max | |
| Max Interconnections | 10 units | |
| Average Rated Life | up to 36,000 Hours | |
| Listed | cULus, Suitable for dry locations only | |
| Mounting Hardware | Included (butt end, mounting clips, screw set) | |
| Junction Box | Required (PEJB005 sold separately) | |
| Features | Flicker free start up Solid state device, vibration resistant High Performance LED technology Low noise electronic LED driver | |

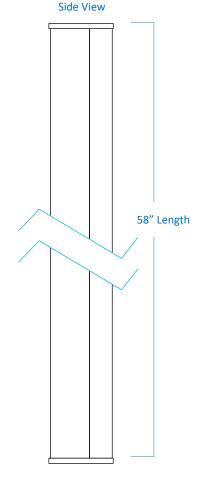





End View





GTA Office: 151 Aviva Park Drive, Woodbridge Ottawa Office: 200 Iber Road, Unit 5, Stittsville

Tel: 905-669-1230 Tel: 613-836-1977 www.sanremolighting.com © All rights reserved