4" Slim LED Downlight

Part Number

R4-D30ES-BN

Project	
Date	
Туре	
Location	

Product SpecificationsDescription4" Round Slim Recessed LEDFinishBrushed nickel trim with frosted lensWattage9W = 50W HalogenDimensions5" Outer Diameter x 1/2" HeightCut OutØ 4-1/8" – 4-1/4"DimensionsDimensible (with compatible TBIAC dimensions)

Cut Out	Ø 4-1/8" – 4-1/4"	
Dim Capacity	Dimmable (with compatible TRIAC dimmer) Dimmable down to 10%	
Rated Lamp Life	Up to 50,000 hours	
Brightness	600 Lumens	
Colour Temp.	3000 Kelvins (warm white)	Includes
Colour Rendering	≥ 80 CRI	quick co
Operating Temp.	-40°C to 40°C (-40°F to 104°F)	
Beam Angle	110° beam	
Certifications	cETLus Certified to CSA standards Suitable for wet locations Type IC rated for direct contact with insulation	
Features	120V 60Hz Slim 1/2" design fits in limited ceiling space Reduce labour time with quick installation No potlight housing required 5 year limited warranty	



ncludes one junction box with quick connectors and factoryinstalled driver inside.







GTA Office: 151 Aviva Park Drive, Woodbridge Ottawa Office: 200 Iber Road, Unit 5, Stittsville


Tel: 905-669-1230 Tel: 613-836-1977 www.sanremolighting.com © All rights reserved


4" Slim LED Downlight

Part Number

R4-D30ES-WH

120V Compatible Dimmers			
BRAND	MODEL		
	CTCL-153PDH		
LUTRON	CTCL-153P		
LUTRON	CT-600P		
	DVCL-153P		
LEVITON	6672		
LEVITON	6674		
PASS & SEYMOUR	HCL453PTCCCV6		

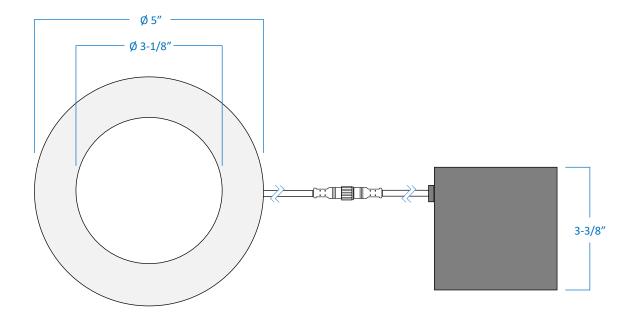

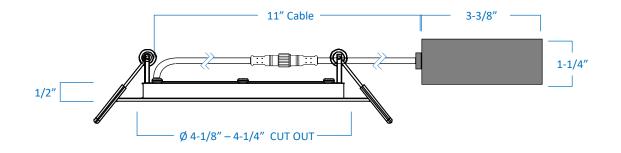



GTA Office: 151 Aviva Park Drive, Woodbridge Ottawa Office: 200 Iber Road, Unit 5, Stittsville

Tel: 905-669-1230 Tel: 613-836-1977 www.sanremolighting.com © All rights reserved