

# 4" Slim LED Downlight 5CCT

Part Number

**R4-BK**

Project \_\_\_\_\_


Date \_\_\_\_\_

Type \_\_\_\_\_

Location \_\_\_\_\_


## Product Specifications

Description	4" Round Slim Recessed LED
Finish	Black trim with frosted lens
Wattage	9W = 65W Halogen
Dimensions	5" Outer Diameter x 3/8" Height
Cut Out	Ø 4-1/4"
Dim Capacity	Dimmable (with compatible TRIAC dimmer) Dimmable down to 10%
Rated Lamp Life	Up to 50,000 hours
Brightness	800 Lumens
Colour Temp.	<b>Selectable 5CCT</b> 2700K, 3000K, 3500K, 4000K, 5000K
Colour Rendering	RA>80 CRI
Operating Temp.	-40°C to +40°C (-40°F to +104°F)
Beam Angle	110° beam
Certifications	cETLus   Certified to CSA standards Energy Star Certified Suitable for wet locations Type IC rated for direct contact with insulation
Features	120V   60Hz Slim 3/8" design fits in limited ceiling space Reduce labour time with quick installation No potlight housing required 5-year limited warranty

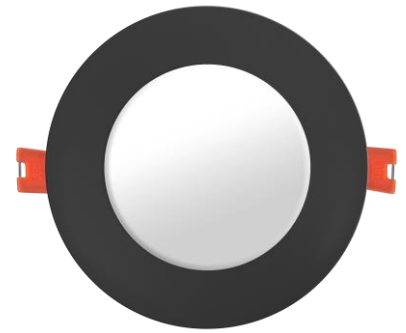

Includes one junction box with quick connectors and factory-installed driver inside.

5CCT switch on side of box.



**5CCT**  
2700K  
3000K  
3500K  
4000K  
5000K

# 4" Slim LED Downlight 5CCT

Part Number  
**R4-BK**

120V Compatible Dimmers	
BRAND	MODEL
LUTRON	CTCL-153PDH
	CTCL-153P
	CT-600P
	DVCL-153P
LEVITON	6672
	6674
PASS & SEYMOUR	HCL453PTCCCV6

