

3" LED Round Gimbal Downlight

Product Code

AFR3G-0730-BN

Finish

Brushed Nickel

Project _____

Date _____

Type _____

Location _____

Product Specifications

| | |
|--------------------|--|
| Energy Used | 7.5W = 50W Halogen |
| Dimensions | 3-3/8" Outer Diameter x 1-3/4" Height |
| Cut Out | 2-3/4" |
| Input Voltage | AC 120V 60Hz |
| Output Voltage | DC 36V, CC 170mA |
| Lamp Life | 36,000 hours |
| Initial Lumens | 600 lm |
| Colour Temperature | 3000K (warm white) |
| Colour Rendering | > 80 CRI |
| Beam Angle | 44° |
| Power Factor | > 0.9 |
| Dim Capacity | Dimmable (with compatible dimmer) |
| Operating Temp. | -40°C ~ 40°C |
| Warranty | Limited 5 year (conditions may apply) |
| Approved Location | For insulated ceilings (IC) Suitable for damp locations |
| Listed | cETLus / Energy Star |

Features

- Slim 1-3/4" design fits where ceiling space is limited
- Reduce labour time with fast and easy installation
- No housing or junction box required



Adjustable Gimbal



Includes integral driver
in connection box.
(No junction box required)



Head Office: 151 Aviva Park Drive, Woodbridge, ON L4L 9C1
Ottawa Office: 200 Iber Road, Unit 5, Stittsville, ON K2S 0L5

Tel: 905-669-1230
Tel: 613-836-1977


© SanRemoLighting.com
Toll Free: 1-800-903-1115

3" LED Round Gimbal Downlight

Product Code

AFR3G-0730-BN

| DIMMER COMPATIBILITY LIST | | |
|---------------------------|---------------|--------------|
| BRAND | MODEL | DIMMING RATE |
| LUTRON | CTCL-153PDH | 100-20% |
| | CTCL-153P | 100-20% |
| | CT-600P | 100-20% |
| | DVCL-153P | 100-20% |
| LEVITON | 6672 | 100-20% |
| | 6674 | 100-20% |
| PASS & SEYMOUR | HCL453PTCCCV6 | 100-20% |

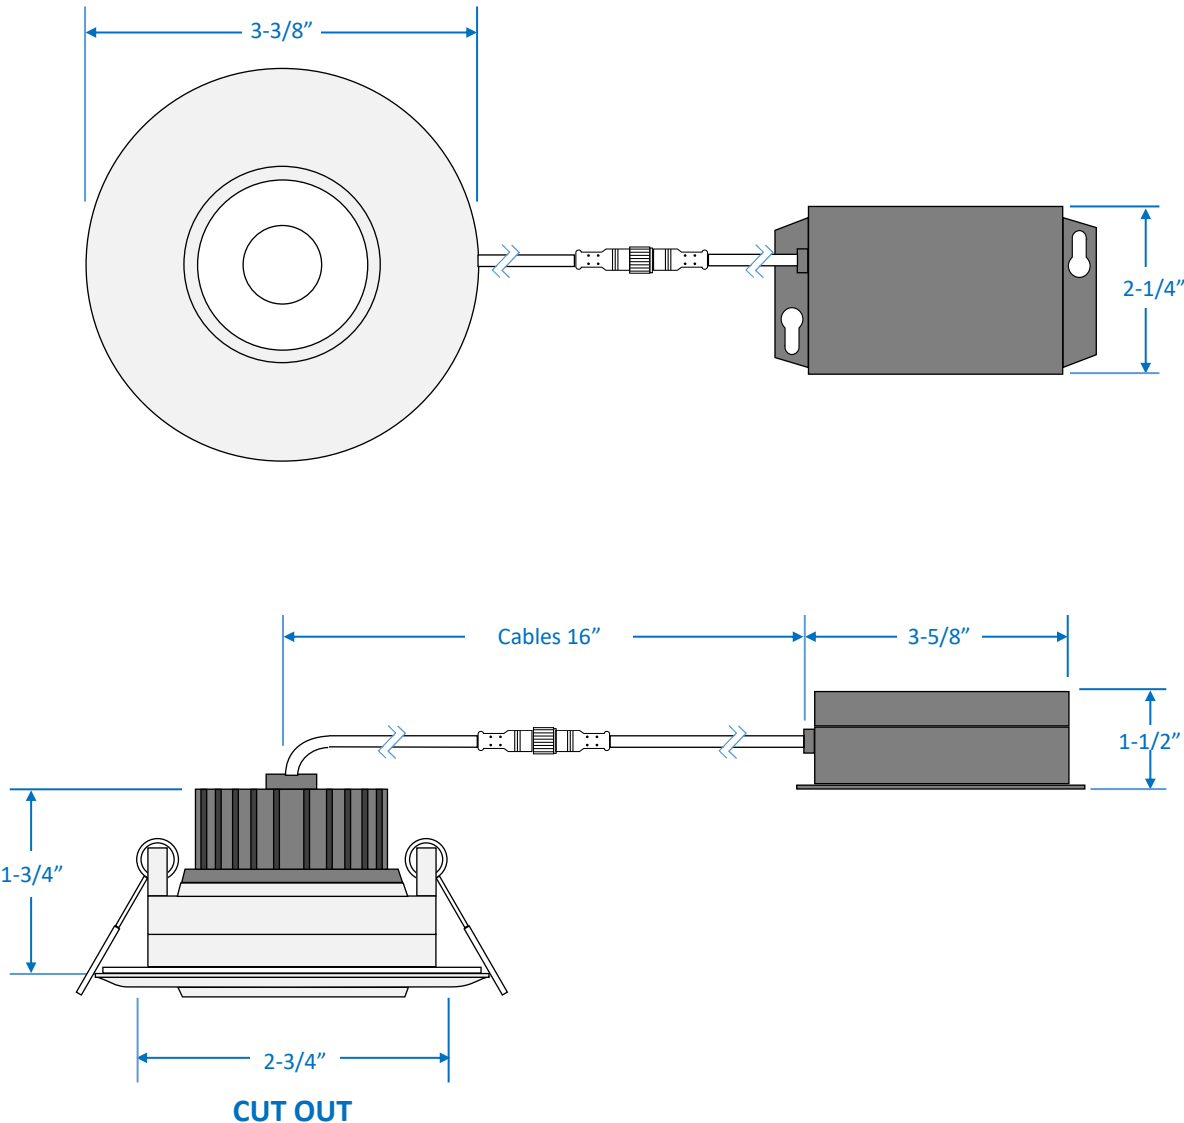

Head Office: 151 Aviva Park Drive, Woodbridge, ON L4L 9C1
 Ottawa Office: 200 Iber Road, Unit 5, Stittsville, ON K2S 0L5

Tel: 905-669-1230
 Tel: 613-836-1977

© SanRemoLighting.com
 Toll Free: 1-800-903-1115