

# 6" Slim LED Downlight 3CCT

Part Number

**R6-WH**

Project \_\_\_\_\_


Date \_\_\_\_\_

Type \_\_\_\_\_

Location \_\_\_\_\_



## Product Specifications

Description	6" Round Slim Recessed LED
Finish	White trim with frosted lens
Wattage	12 Watts = 80W Halogen
Dimensions	Ø 7-1/8" Outer Diameter x 3/8" Height
Cut Out	Ø 6-1/4"
Dim Capacity	Dimmable (with compatible TRIAC dimmer) Dimmable down to 10%
Rated Lamp Life	Up to 50,000 hours
Brightness	770-900 Lumens
Colour Temp.	Selectable CCT – 3000K, 4000K, 5000K
Colour Rendering	≥ 80 CRI
Operating Temp.	-40°C to 40°C (-40°F to 104°F)
Beam Angle	110° beam
Certifications	cETLus   Certified to CSA standards Suitable for wet locations Type IC rated for direct contact with insulation
Features	120V   60Hz Slim 3/8" design fits in limited ceiling space Reduce labour time with quick installation No potlight housing required 5 year limited warranty

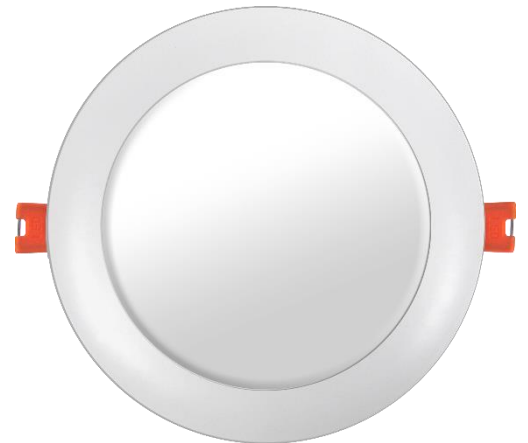

Includes one junction box with quick connectors and factory-installed driver inside.

3CCT switch on side of box.



**3000K**  
**4000K**  
**5000K**




# 6" Slim LED Downlight 3CCT

Part Number

**R6-WH**

120V Compatible Dimmers	
BRAND	MODEL
LUTRON	CTCL-153PDH
	CTCL-153P
	CT-600P
	DVCL-153P
LEVITON	6672
	6674
PASS & SEYMOUR	HCL453PTCCCV6

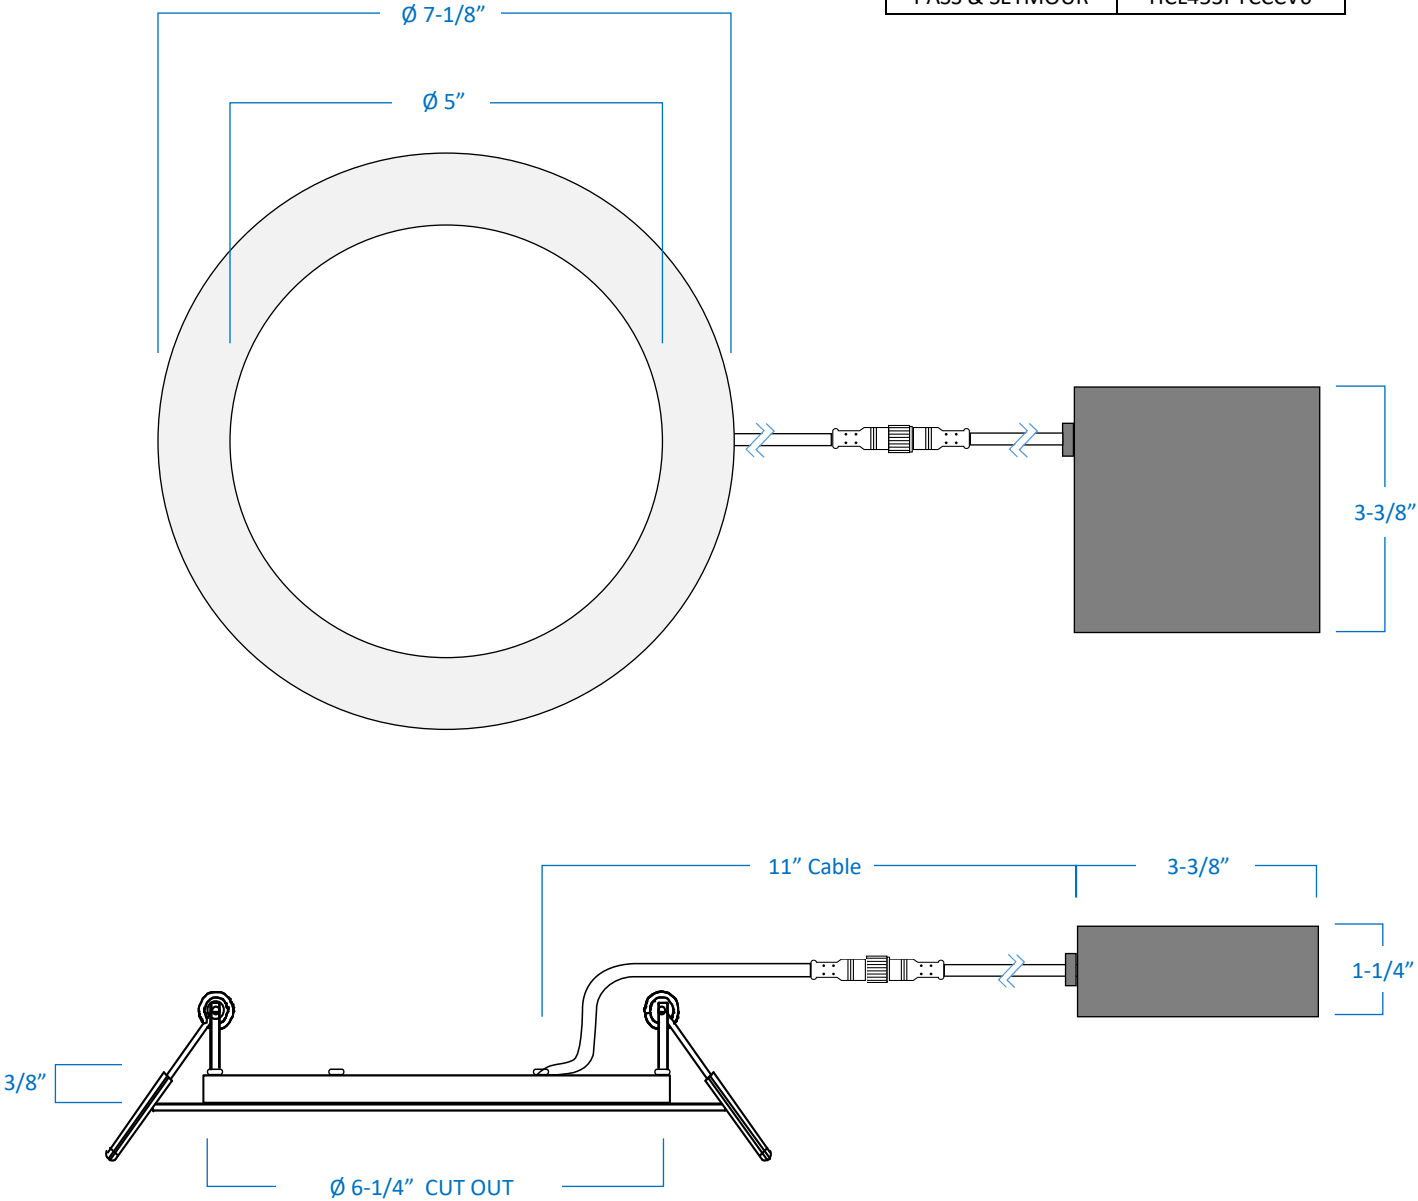

GTA Office: 151 Aviva Park Drive, Woodbridge  
 Ottawa Office: 200 Iber Road, Unit 5, Stittsville

Tel: 905-669-1230  
 Tel: 613-836-1977

www.sanremolighting.com  
 © All rights reserved