


**Recessed Lighting**  
**4" Slim LED Downlight**

**AFR4C-0930-WH** (White)

Project \_\_\_\_\_  
 Date \_\_\_\_\_  
 Type \_\_\_\_\_  
 Location \_\_\_\_\_  
 Comments \_\_\_\_\_

**Product Specifications**

Description: 4" Slim LED Downlights  
 Wattage: 9 Watts  
 Dimensions: 4 3/4" Overall Diameter  
 1/2" Height  
 Cut Out: 4 3/16"  
 Lens: Frosted  
 Finish: White  
 Input Voltage: 120V  
 Output Voltage: 20-25V DC  
 Life: 36,000 hours  
 Initial Lumens: 500  
 Colour Temp: 3000K (warm white)  
 CRI: > 80  
 Beam Angle: 110°  
 Dimmable: Yes (with compatible dimmer)  
 Equivalent: 50W Halogen  
 Operating Temp: -40°C ~ 40°C  
 Approved Location: Insulated ceilings, wet locations & soffit installations  
 Certifications: cETLus / Energy Star

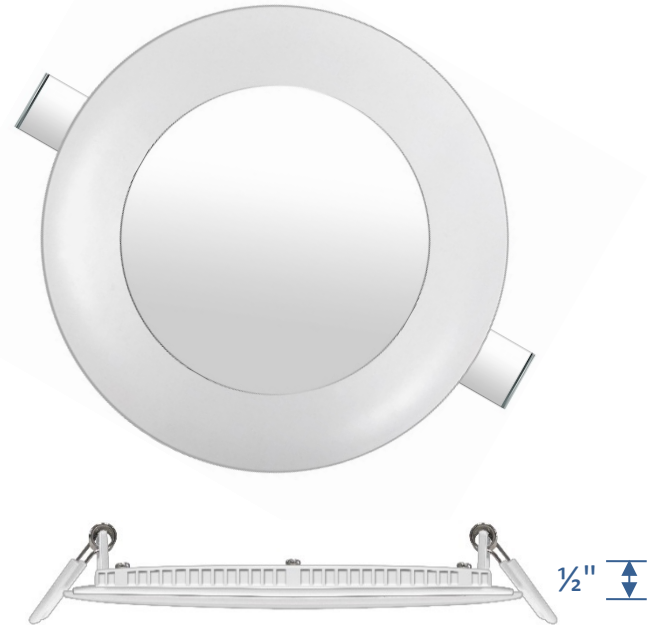


Includes one junction box with quick connectors and factory-installed driver inside.



DIMMER COMPATIBILITY LIST		
BRAND	MODEL	DIMMING RATE
LUTRON	CTCL-153PDH	100-20%
	CTCL-153P	100-20%
	CT-600P	100-20%
	DVCL-153P	100-20%
LEVITON	6672	100-20%
	6674	100-20%
PASS & SEYMOUR	HCL453PTCCCV6	100-20%

**Accessories Sold Separately**

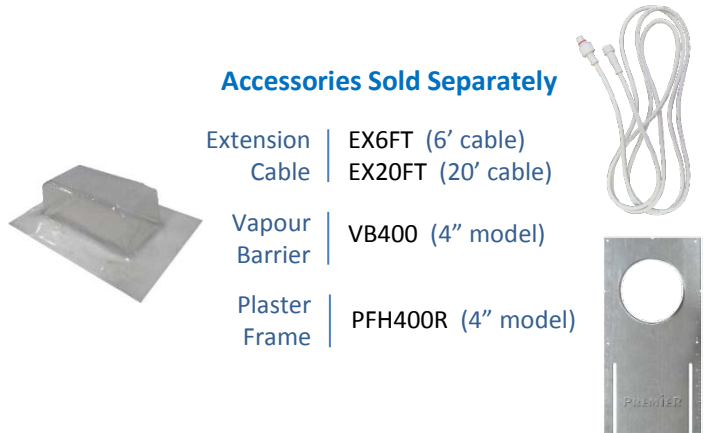

Extension Cable | EX6FT (6' cable)  
 | EX20FT (20' cable)

Vapour Barrier | VB400 (4" model)

Plaster Frame | PFH400R (4" model)

Distributed By



Toronto Office: 151 Aviva Park Drive, Woodbridge  
 Ottawa Office: 200 Iber Road, Unit 5, Stittsville

Tel: 905-669-1230  
 Tel: 613-836-1977

sanremolighting.com  
 © 2017 All rights reserved.