

4" Line Voltage Insulated Housing

Project _____

Date _____

Type _____


Location _____

Part Number

H400RICAT

Product Specifications

Description	4" line voltage remodel post drywall housing
Housing	<ul style="list-style-type: none">▪ Line Voltage▪ IC Rated Air-Tight housing▪ Thermally protected
Dimensions	11" Length x 4-7/8" Height 4" Diameter (Aperture)
Junction Box	<ul style="list-style-type: none">▪ Junction box is listed for through branch circuit wiring and has seven 1/2" knockouts▪ Four Romex pryouts with strain relief simplify Romex installation▪ 4-port quick connector is pre-installed in junction box for easy installation
Lamps	1 x LED PAR16 or PAR20 (E26 Medium Base) 120V Max. 50W (lamp not included)
Certifications	cUL Listed with feed-through wiring Suitable for damp locations Certified to CSA standards
Features	<ul style="list-style-type: none">▪ Two durable screw-down clips secure housing and accommodate various ceiling thickness▪ Unit slips through 4-1/4" ceiling opening▪ For use in insulated ceilings or 3" space between housing and insulation▪ For use with Premier Electrical Products™ trims

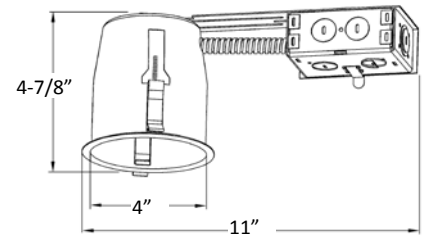

Accessories Sold Separately

- PFH400RS** Small Rough-In Plate
- PFH400R** Standard Rough-In Plate
- PFH400RL** Large Rough-In Plate



GTA Office: 151 Aviva Park Drive, Woodbridge
Ottawa Office: 200 Iber Road, Unit 5, Stittsville

Tel: 905-669-1230
Tel: 613-836-1977

www.sanremolighting.com
© All rights reserved

